

### APPLICATION

The 220985B Replacement Battery Assembly is a kit to replace the clock battery in a T8182A or T8082A Chronotherm Thermostat or CT200, CT201 or CT202 Fuel Saver Thermostat. Included is a rechargeable nickel cadmium battery, battery holder with color-coded leads, and 2 crimp connectors. This kit replaces 193933, 193933A, and 195044 Batteries.

### CAUTION

Use only 1.2 V, AAA size rechargeable (Ni-Cad) battery. Other types can damage thermostat.

### IMPORTANT

When replacing clock battery, always turn off power at the furnace location or remove thermostat from wall.

### INSTALLATION

If the clock battery will not hold a charge, replace by following the procedure in Fig. 1. After replacing, charge the battery for 30 minutes by moving both temperature levers all the way left to the lowest set point. Temperature at the thermostat must remain above the set point. If available, the 192075A Fast Charge Assembly may be used. Follow instructions included in kit. Return levers to desired set points after replacement battery is charged. Limit use of fast charge kit to 2 minutes.

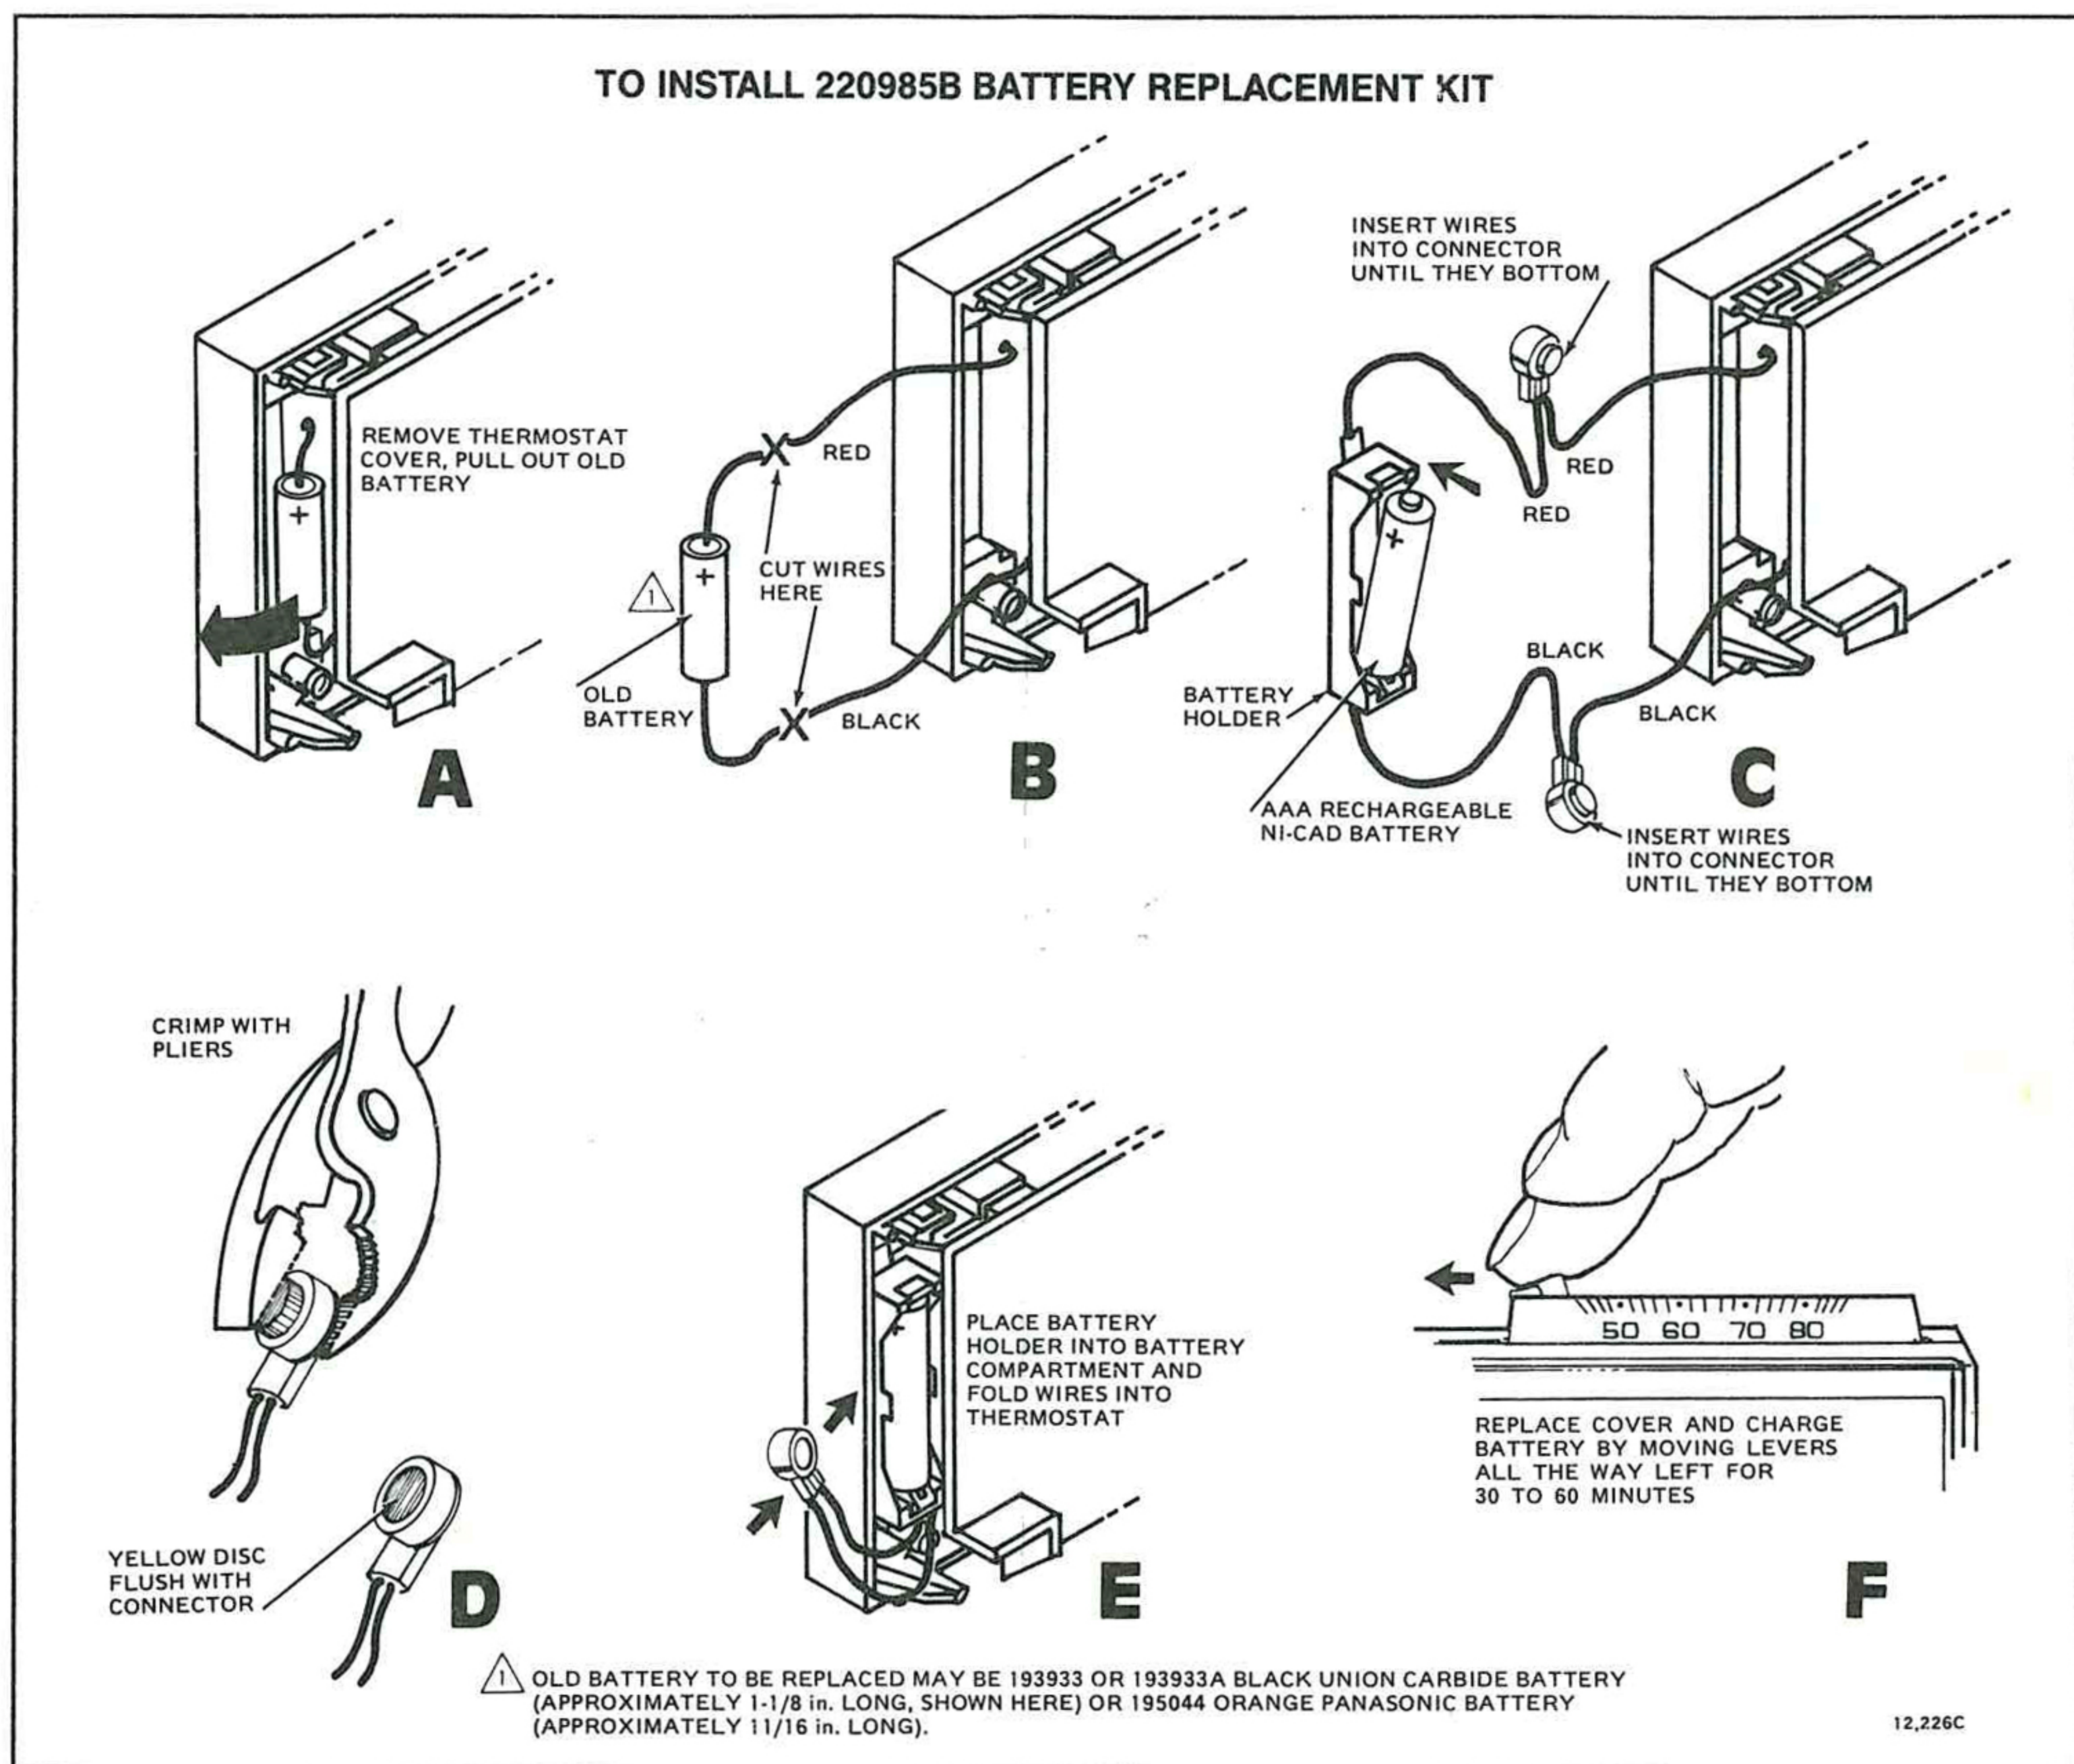


Fig. 1—Replacing clock battery.

**Honeywell Inc.**  
1885 Douglas Drive N.  
Golden Valley, MN 55422-4386

International Sales Offices in all principal cities of the world. Manufacturing in Australia, Canada, Finland, France, Germany, Japan, Mexico, Netherlands, Spain, Taiwan, United Kingdom, U.S.A.

PRINTED IN U.S.A.

