

Installation Instructions

⚠ WARNING

This thermostat must not be used on any water heater with less than six gallon capacity because it could result in an explosion causing **DEATH, SERIOUS BODILY INJURY, OR PROPERTY DAMAGE**. If you have any questions consult your local retailer.

1. PART

This 2 terminal lower thermostat replaces all other 2 terminal thermostats.

⚠ WARNING

For safe operation of your water heater, use the thermostat terminal cover provided. Failure to do this could result in **DEATH, SERIOUS BODILY INJURY, OR PROPERTY DAMAGE**.

2. TOOLS NEEDED




Phillips Head Screwdriver

⚠ WARNING

HAZARD OF ELECTRICAL SHOCK! Before removing any access panels or servicing the water heater, make sure the electrical supply to the water heater is turned "OFF". Failure to do this could result in **DEATH, SERIOUS BODILY INJURY, OR PROPERTY DAMAGE**.

3. INSTALLATION INSTRUCTIONS

1. SHUT OFF the electric power to the water heater.
2. Remove the access panel and fold back the insulation.
3. Remove the plastic terminal protector and discard; a new one has been provided.

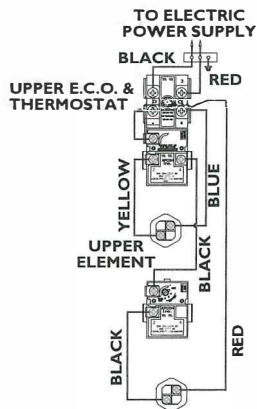

NOTE: Color of wires may be different but wiring locations will be the same. Also, some of the terminals may require straight-in wiring through an eye-opening. If wires are now looped, re-cut and strip wire 3/8" to a straight length and insert.

4. Disconnect wires from thermostat and slide it out of the bracket.
5. Place the new lower thermostat in the bracket making sure it fits firmly against the tank.
6. Attach the wires to the new thermostat. **See note above.**
7. Put plastic terminal cover provided back in place.
8. Carefully fold insulation back to cover the thermostat.
9. Replace access panel. Then turn the electric power on.