


Electrical Ratings

Voltage Power	Consumption	Load Switching
24 VAC	2.5 VA	2 A at 24 VAC

Note: A 15mA minimum current draw is required.

Dimensions, in. (mm)

A NPT	B	C	D	E
$\frac{3}{4}$	$1 \frac{3}{16}$ (30.2)	$1 \frac{3}{16}$ (30.2)	$5 \frac{3}{4}$ (146)	$1 \frac{7}{8}$ (47.6)

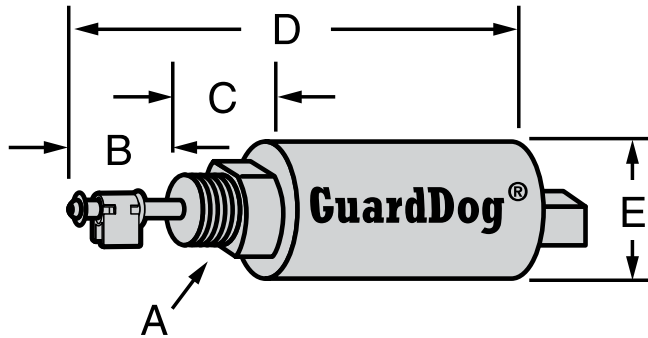

Ordering Information

Model Number	Part Number	Description
RB-24E	144692	Residential LWCO
RB-24E-A	144694	Residential LWCO w/vent damper harness
RB-24E-S	144693	Residential LWCO w/control board harness
RB-24E-L	144690	Residential LWCO w/burner control harness
UWH-RB-24A	144681	Replacement cable for RB-24E-A
UHW-RB-24S	144682	Replacement cable for RB-24E-S
UHW-RB-24L	144691	Replacement cable for RB-24E-L



McDonnell & Miller



ITT
 8200 N. Austin Ave.
 Morton Grove, Illinois 60053
 Phone: 847-966-3700
 Fax: 847-966-9052
www.mcdonnellmiller.com

McDonnell & Miller and GuardDog are registered trademarks of ITT Corporation. The Engineered Blocks Symbol and Engineered for Life are registered trademarks of ITT Manufacturing Enterprises, Inc.

MM-288 04/09