



Item		Specification
Model Name		N-069M-DV
Type	Installation	Indoor, Wall Hanging
	Air-supply/Exhaust	Direct Vent (Sealed Combustion)
Ignition		Direct Ignition
Operating Water Pressure		15 - 150 PSI
Minimum Flow Rate		0.7 GPM
Gas Supply Pressure		NG : 4.0" - 10.5" LP : 8.0" - 14.0"
Dimensions		24.2"(Height) x 18.3"(Width) x 9.4"(Depth)
Weight		63 (pounds)
Water Holding Capacity		0.3 Gallon
Connection Sizes	Water Inlet	3/4"
	Hot Water Outlet	3/4"
	Gas Inlet	3/4"
Power	Supply	120VAC(60Hz)
	Consumption	NG: 70W LP: 74W Freeze Prevention 135W
Material	Casing	Zincified Steel Plate / Acryl Coating
	Flue Collar	Stainless Steel
	Heat Exchanger	Copper Sheetting, Copper Tubing
Safety Devices		Flame Rod, Thermal Fuse, Pressure Relief Valve, Wind Pressure Switch, Lightning Protection Device (ZNR), Electric Leakage Prevention Device(GFCI), Overheat Prevention Device, Freezing Prevention Device, Fan Rotation Detector
Accessories		Remote Cotroller, Remote Controller Cord, Exhaust Adapter, Anchoring Screws

# Model N-069M-DV Product Performance



[Winter] Water temperature: 46 °F

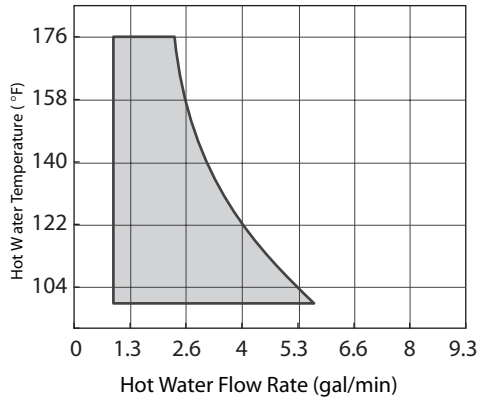

[Spring/Fall] Water temperature: 64 °F

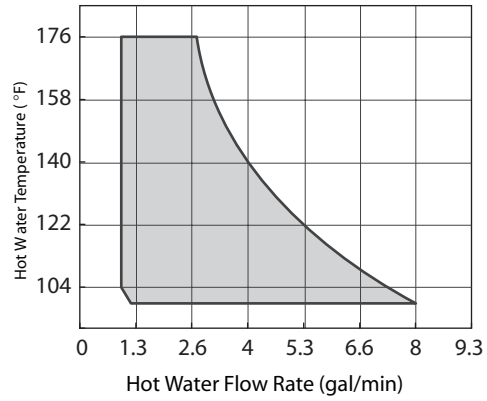

[Summer] Water temperature: 82 °F

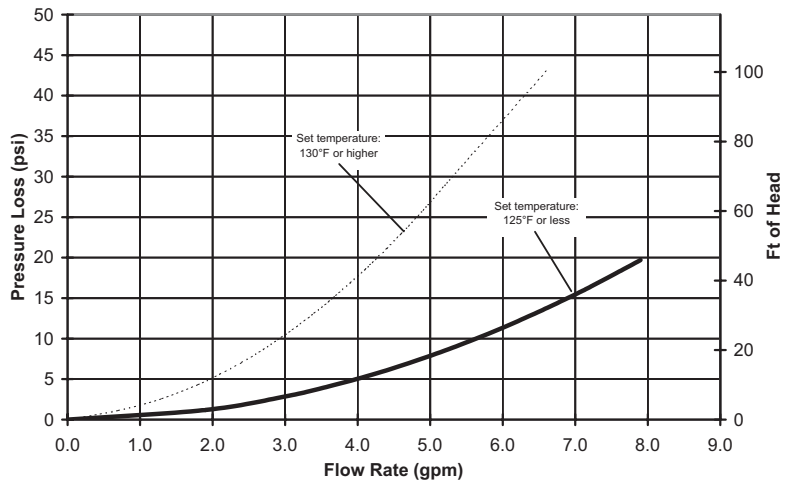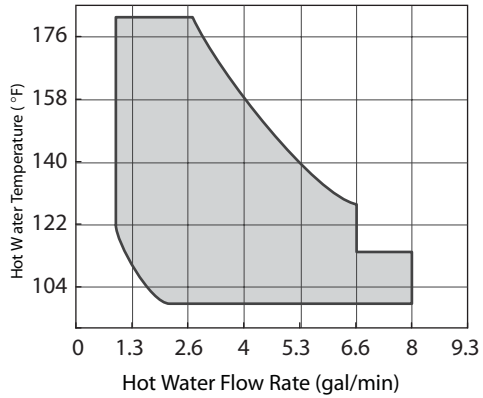

Item		Maximum Performance	Minimum Performance
Gas	NG	194,000 btuh	25,000 btuh
Consumption	LP	194,000 btuh	25,000 btuh
Hot Water Capacity	45°F Rise	6.9 Gal/min.	
	77°F Rise	4.0 Gal/min.	
	100°F Rise	3.1 Gal/min.	
Capacity Range		0.7 - 7.9 Gal/min.	
Temperature Settings		100-150°F (In 5°F intervals) ,160, 170, 176°F (14 Options)	
Default Temperature Options		120, 130, 140, 176°F (Original is 120°F)	

Architect/Engineer \_\_\_\_\_

Customer/Job Name \_\_\_\_\_

Address \_\_\_\_\_

Contractor \_\_\_\_\_

Date \_\_\_\_\_ Phone \_\_\_\_\_