Installation Instructions

1. PART

This upper thermostat replaces most other upper thermostats.

A WARNING

For safe operation of your water heater, use the thermostat terminal cover provided. Failure to do this could result in DEATH, SERIOUS INJURY, OR PROPERTY DAMAGE.

2. TOOLS NEEDED




Phillips Head Screwdriver


3. INSTALLATION INSTRUCTIONS

A WARNING

HAZARD OF ELECTRICAL SHOCK! Before removing any access panels or servicing the water heater, make sure the electrical supply to the water heater is turned "OFF". Failure to do this could result in DEATH, SERIOUS BODILY INJURY, OR PROPERTY DAMAGE.

- 1. SHUT OFF the electric power to the water heater.
- 2. Remove the top access panel and fold back the insulation.
- 3. Remove the plastic terminal cover and discard; a new one has been provided.
- Determine which is your wiring from the diagrams below.



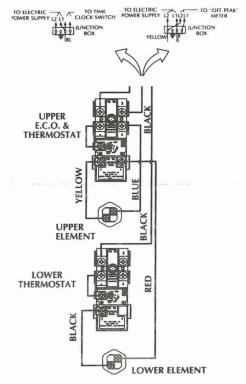

NOTE: Color of wires may be different but wiring locations will be the same. Also, some of the terminals may require straight-in wiring through an eye-opening. If wires are now looped, re-cut and strip wire 3/8" to a straight length and insert.

- 5. Disconnect wires from thermostat and slide it out of the bracket.
- Place the new thermostat in the bracket making sure it fits firmly against the tank.

A WARNING

Failure to place the thermostat behind the thermostat bracket and against the tank could cause overheating resulting in DEATH, SERIOUS INJURY, OR PROPERTY DAMAGE.

- 7. Put plastic terminal cover provided back in place.
- 8. Carefully fold insulation back to cover the thermostat.
- 9. Replace access panel. Then turn the electric power on.